


Installation instructions for Austratus Lighting System



The LED lighting package, exclusive to Austratus, fits seamlessly into the Austratus ceiling system, a sophisticated and elegant addition to your space.

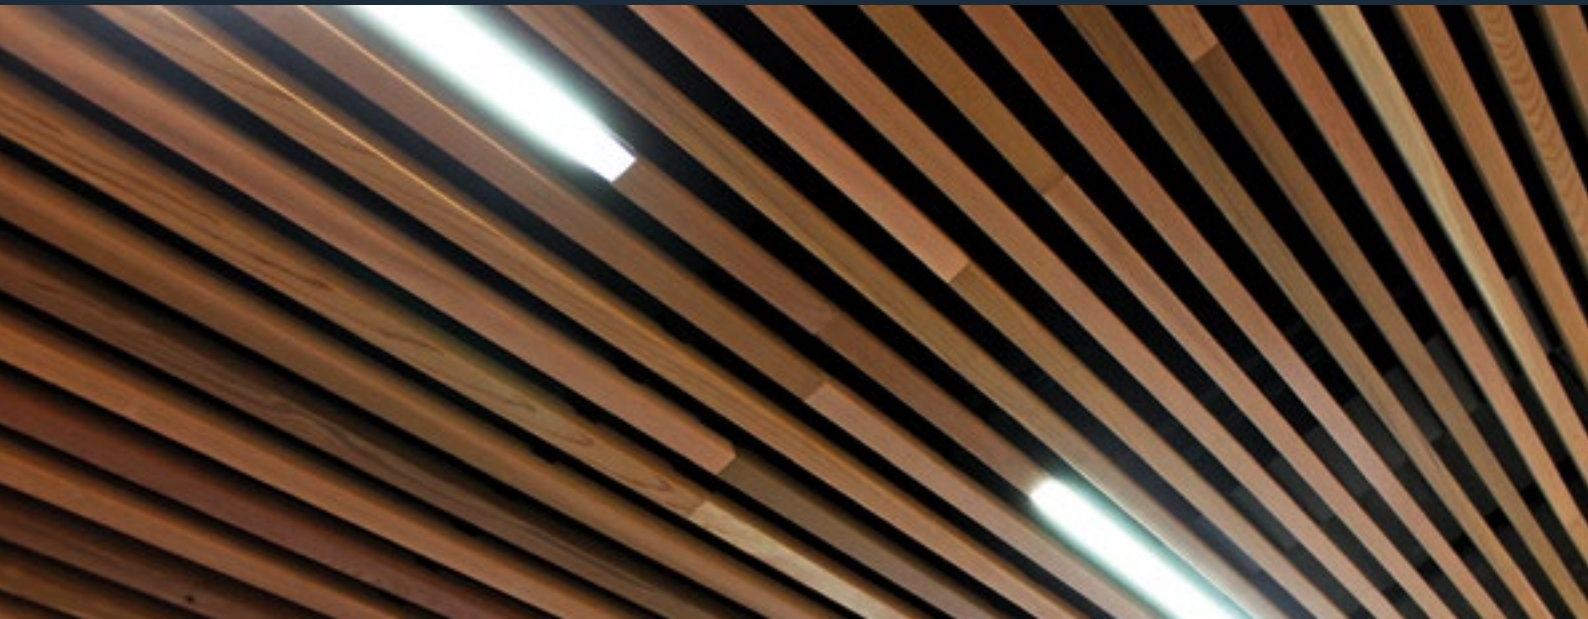

Retail shopfitting



Auditoriums



Theatres



Office and commercial fit-outs



Homes



Clubs, pubs, restaurants
and hotels

The package:

- 4 x lineal 1 m LED Aluminium Profiles
- 1 x 240W driver
- 1 x 4-way LED adapter
- 1 x 3m Connection Wire 10 amp
- 1 x 6m Connection Wire 10 amp
- 2 x 9m Connection Wire 10 amp.

Specifications:

- Model No: PR-AUSLIGHT -AL-4PK-LED
- Track Colour: Silver
- Material: Aluminium
- Clear Cover: PC
- Size: 30mm x 20mm x 1000mm
- Application: Out of weather
- IP Rating: IP20
- Wattage: 55W /fitting
- Power: 240V AC/ 24V DC
- Driver: 240W
- Warranty: 12 Months

Installation instructions for Austratus Lighting System

These instructions are mandatory and must be followed.

1. The lineal lighting strips must be free from all packaging before installation.
2. Insulation must not be installed over the light fittings or driver. This is to allow clear and unhindered ventilation for cooling.
3. Only use the correct clips supplied with fittings for fixture to the Aluminium Austratus extrusion supplied.
4. Lighting must not be side butted but be kept the clip distance (30mm) as a minimum between fittings.
5. Power to be supplied by electrician to plug 240V 10 amp for driver remainder of job "plug and play" with RCD protection.
6. Ensure male to female plugs are connected correctly, noting flats on the plugs.
7. No more than 4 lights are to be fitted to each driver. **DO NOT** piggy back the 4-outlet socket.
8. The total watts per light must not exceed the driver outlet wattage.
9. Light clips must be fixed by shallow head screw supplied.
10. The cable exiting light must be secured by a cable tie, directly above the fitting.
11. It is recommended that no more than three light groups are switched together.

